

LABELX[®] JR TR

1

Semiautomatic labeller
for application onto cylindrical
products: bottles, flacons,
cans, jars.



Labelling module: LABELX JR 140-250.

- Product diameter: **min. 30 mm - max. 120 mm**
- Max. label width: **140-250 mm**
- Approx dimension: **900 x 700 x 850 mm**


EN

STANDARD FEATURES

Mechanical unwinder
Stop photocell
Positioning device with motorized rolls
Top table base support
Micrometric adjustment unit
Applicator roll with start sensor



Pneumatic roller applicator



Hot foil coding units



APPLICATIONS AREAS



OPTIONAL ACCESSORIES

Photocell for transparent labels
Hot foil coding units
Thermal transfer printing units
Floor base with locking castors

LABELX® JR TPN

1

Semiautomatic labeller for application onto flat products.




Labelling module: LABELX JR 140-250.

- Positioners: **adjustable guides - templates for irregular products**
- Applicator pad: **customized on request**
- Approx dimensions: **1100 x 700 x 850 mm**

EN

STANDARD FEATURES

Mechanical unwinder
Stop photocell
Positioning device with adjustable guides
Top table base support
Micrometric adjustment unit
Pneumatic applicator with security start buttons

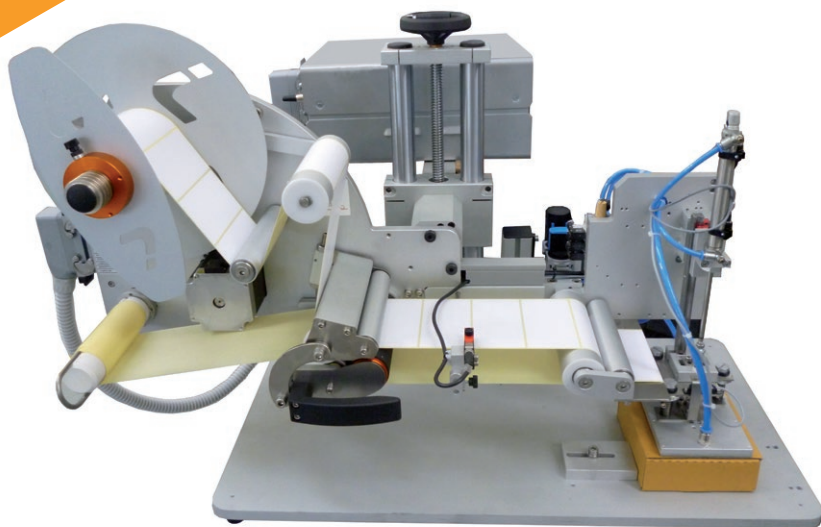

Safety protections



Positioner for irregular products

APPLICATIONS AREAS



OPTIONAL ACCESSORIES

Photocell for transparent labels
Hot foil coding units
Thermal transfer printing units
Floor base with locking castors

LABELPACK®
LABELLING EVOLUTION

www.labelpack.it